

COMMUNICATION CABIN - MACHINE ROOM

GSM Lift Watch prepoj



Installation Manual v1.0

The device is intended as a supplement to the GSM Lift Watch Voice. It enables communication between the lift cabin and the machine room in which it is mounted.

It is inserted in the line between the GSM part (GLWV) and speaker/microphone unit (ReMic/ReMicL) located in the lift car (lift cabin).

Basic technical parameters:


Power supply from 9VDC to 18VDC, approx. 50 mA


(depending on traffic)

Dimensions 110 x 110 x 52 mm (without mounts)

Function:

- After turning permanent interception cabin (not interrupted connection for emergency calls to GSM unit)
- volume control interception
- After pressing the activation button of microphone, calling to cabin of elevator

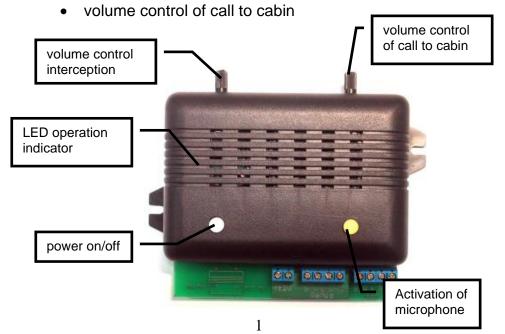

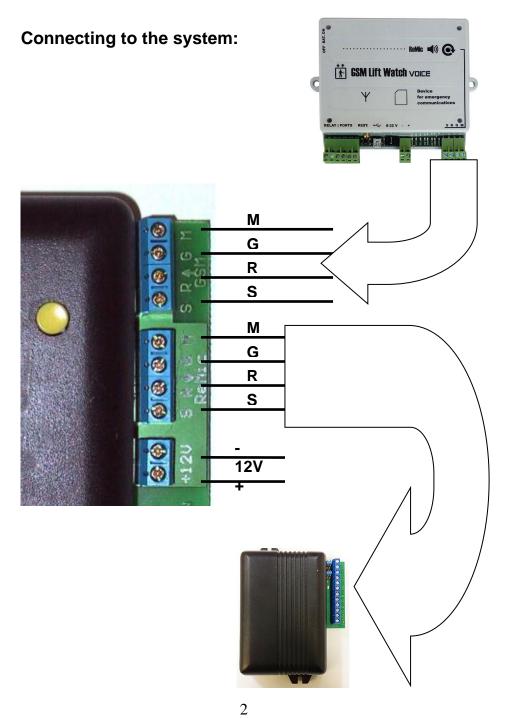

Installation:

