

IP Door Phone IPDP

- **Voice, video, keypad access control via SIP**
- **Web server for remote control and configuration**
- **SIP connection P2P or IP PBX**
- **Modularity**

The **VoIP Door** phone is a complete door entry solution based on IP communication.

The **connection** via SIP P2P protocol to different IP systems or LAN makes it very attractive for all company sizes.


The **support of video** as well as audio via SIP gives many opportunities of practical use - in private sector and also for security purposes.

Programming, maintenance and firmware upgrade is done through included web server. The unit is reachable from any place around the world easily.



Benefits

- Modular system allows to connect 1 to 64 buttons
- Two call numbers stored at each button (day/night mode or consecutive dialling)
- Possible to connect two independent locks for door opening
- Two codes for hanging up the unit from telephone
- Two codes for door opening from telephone
- Six code locks (password from buttons at the door)
- Possibility to connect a numerical keyboard – the unit can include 4-18 standard buttons
- Integrated heating of printed circuit
- Permanent lighting through visiting cards
- Color camera with MJPG / RTSP streaming
- Ethernet – 10/100Mb with standard 10BaseT a 100BaseTx
- Web server for remote configuration – BOA
- Operating system – Linux 2.6
- SIP connection P2P or PBX network system
- WEB – firmware upgradeable
- WEB – interface for control and setup parameters

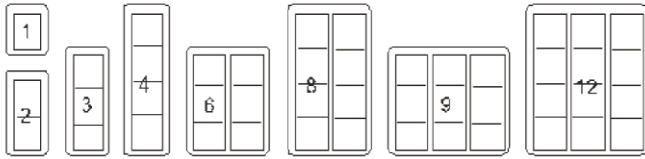

Complete module



Base embedded



Surface mounted

Surface mounted or embedded

Accessories

- Cases for surface mounted
- Cases for embedded mounted
- Module with labels for companies names

Features

- Settings – website interface - remote management
- Power supply - 12 volts +/- (door unit, light, relays and camera)
- Environment
 - Storage Temperature range: -20 ° C ÷ +70 ° C
 - Operating Temperature range: -20 ° C ÷ +70 ° C
 - Humidity: 10% to 80% at 30 ° C
- Camera with MJPG / RTSP streaming
 - switchable resolution –
 - 320 x 240 points
 - 640 x 480 points
 - color, contrast, brightness adjustable
 - H.263/H.264 protocol supported

Models

- IPDP-00 – basic module without button
- IPDP-00C – basic module with integrated camera
- IPNC1,C2,C4 – additional button module with 1,2, or 4 buttons
- IPDP-K – additional module with numeral keypad

